


DIMENSIONS - TEMPEST HEAT PUMP INDIRECT

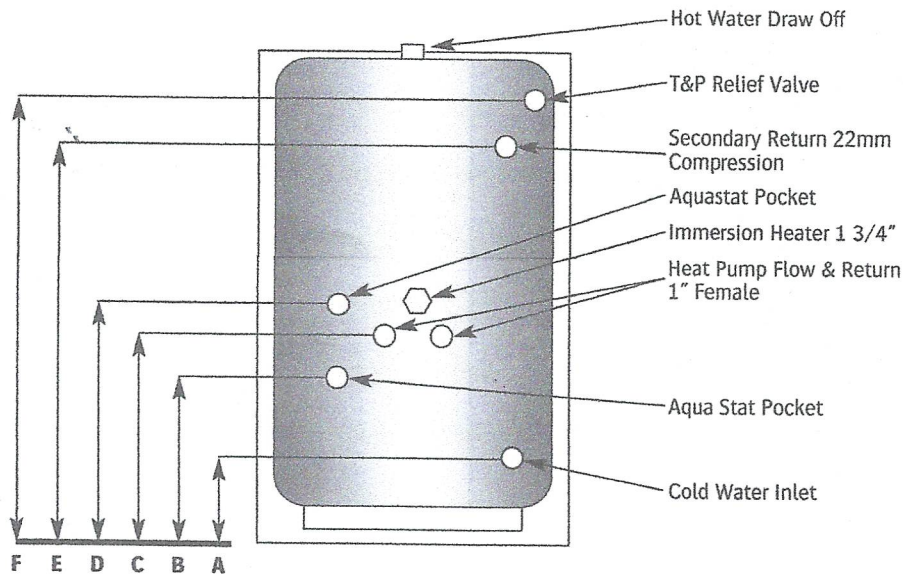

All dimensions are given in mm and are subject to change without notice.

Cap (Ltr)	170	200	250	300	400	500	Cap (L)	Heat Pump Coil Surface Area (m ²)
Height	1200	1500	1800	1650	1590	1835	170 Ltr	2
Diameter	510	580	580	580	710	710	200 Ltr	3.3
A	173	173	173	201	240	240	250 Ltr	3.3
B	373	223	423	301	555	540	300 Ltr	3.3
C	523	670	723	801	740	740	400 Ltr	3.3
D	623	770	873	901	840	890	500 Ltr	3.3
E	923	1123	1473	1261	1240	1390		
F	1023	1323	1624	1441	1340	1570		

Foam Information	
ODP Ozone Depletion potential = 0	
GWP Global Warning Potential = 2.2	
Foam Type = Polyurethane	
British Standard 1566, D: 2002	
Parts Supplied	
Dual High Limit Stat	
3Kw Immersion Heater 240V single Phase	
Expansion Vessel	
7Bar Temperature & Pressure Relief	
3Bar Inlet Control Group	
Two Port Motorised Valve	

Connection Sizes	
120 - 300	H/P Coil
120 - 300	All other connections 22mm compression
400 - 500	1" Female BSP

Cap (L)	ERP Band	Immersion Heater	Standing Heat Loss
200 Ltr	C	1 x 3Kw 240v single phase	2.04kwh/24hrs
250 Ltr	C	1 x 3Kw 240v single phase	2.16kwh/24hrs
300 Ltr	C	1 x 3Kw 240v single phase	2.32kwh/24hrs
400 Ltr	C	1 x 3Kw 240v single phase	2.58kwh/24hrs
500 Ltr	C	1 x 3Kw 240v single phase	2.81kwh/24hrs