



STAINLESS PRO

UNVENTED MAINS PRESSURE
HOT WATER CYLINDERS



✓ FLEXIBLE PRICING ✓ 25 YEAR WARRANTY ✓ FAST DELIVERY

ONE NAME. EVERY SOLUTION.

WWW.GLEDHILL.NET



BUILT ON EXPERIENCE

THE GLEDHILL BRAND HAS BEEN SYNONYMOUS WITH QUALITY MANUFACTURING AND EXPERTISE FOR ALMOST A CENTURY. SPECIALISING IN A COMPLETE RANGE OF WATER HEATING AND STORAGE SOLUTIONS, ALL OUR STAINLESS STEEL CYLINDERS ARE DESIGNED AND MANUFACTURED AT OUR BLACKPOOL HEADQUARTERS.

Our stainless steel hot water cylinders is the result of continuous product development and innovation; with Gledhill having produced unvented cylinders since their very inception.

OUR NETWORK

IN ANSWER TO THE DEMANDS OF CUSTOMERS WE HAVE SPECIFICALLY TAILORED OUR DISTRIBUTION NETWORK TO ENSURE OUR PRODUCTS REACH THEIR DESTINATION IN A DIRECT AND EFFICIENT MANNER.

Our unique structure, consisting of five distribution hubs, is geographically situated for effective, widespread product availability. Headed by our central sales and logistics team at our Blackpool headquarters and transported via our own fleet of Gledhill vehicles, we have ultimate control over the delivery of our products, enabling us to add value to our customers, meet demanding orders and high service expectations.



FOR ORDERS
08000 427 427
ORDERS@GLEDHILL.NET



FOR TECHNICAL SUPPORT
01253 474 584
TECHNICALSUPPORT@GLEDHILL.NET

STAINLESS PRO

DIRECT

90 | 120 | 150 | 180 | 210 | 250 | 300 LITRES



KEY FEATURES

- Designed with flat top to increase insulation
- Aligned tapping positions promote easier installation
- Colour matched components for visual appeal
- Wide base to improve unit stability
- Durable rubber connection labels and caps with foam retention
- External expansion allows for installation in height restricted areas and easier servicing
- Suitable for use with economy electricity tariffs to maximise efficiency



25 YEAR
WARRANTY




SOLAR
PHOTOVOLTAIC



IMMERSION
HEATER

TECHNICAL SPECIFICATION

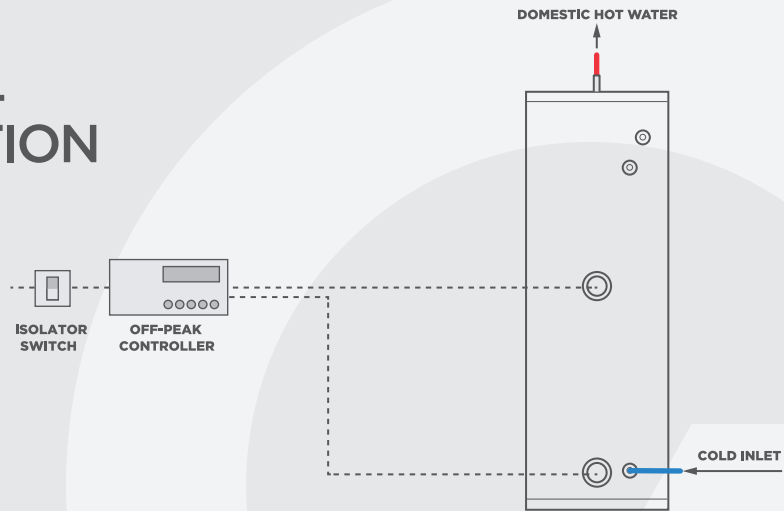

STAINLESS PRO DIRECT

| Description | | D90 | D120 | D150 | D180 | D210 | D250 | D300 |
|-----------------------------|--------|---------|----------|----------|----------|----------|----------|----------|
| Product stock code | | PRODR90 | PRODR120 | PRODR150 | PRODR180 | PRODR210 | PRODR250 | PRODR300 |
| ErP rating | | C | C | C | C | C | C | C |
| Heat loss | watts | 32 | 39 | 47 | 55 | 62 | 74 | 86 |
| Capacity | litres | 91 | 119 | 148 | 178 | 208 | 248 | 287 |
| Height | mm | 764 | 931 | 1118 | 1306 | 1494 | 1744 | 1990 |
| Diameter | mm | 550 | 550 | 550 | 550 | 550 | 550 | 550 |
| Weight (empty) | kg | 18 | 21 | 25 | 28 | 32 | 36 | 41 |
| Weight (full) | kg | 109 | 140 | 173 | 206 | 240 | 284 | 328 |
| Heat up time | min | 90 | 119 | 150 | 179 | 209 | 249 | 299 |
| Number of immersions | | 1 | 2 | 2 | 2 | 2 | 2 | 2 |
| Secondary return | | No | No | No | No | Yes | Yes | Yes |

NOTES:

- 1 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 2 For further ErP information, please refer to the installation manual at www.gledhill.net
- 3 The schematics shown above are representational, please refer to the installation manual for full technical requirements

STAINLESS PRO

INDIRECT

90 | 120 | 150 | 180 | 210 | 250 | 300 LITRES



KEY FEATURES

- A and B ratings for sizes up to 210L
- Designed with flat top to increase insulation
- Aligned tapping positions promote easier installation
- Colour matched components for visual appeal
- Wide base to improve unit stability
- Durable rubber connection labels and caps with foam retention
- Corrugated coil provides increased heat transfer and prevention of scale build up
- External expansion allows for installation in height restricted areas and easier servicing



25 YEAR
WARRANTY




GAS OR OIL
BOILERS



IMMERSION
HEATER

TECHNICAL SPECIFICATION

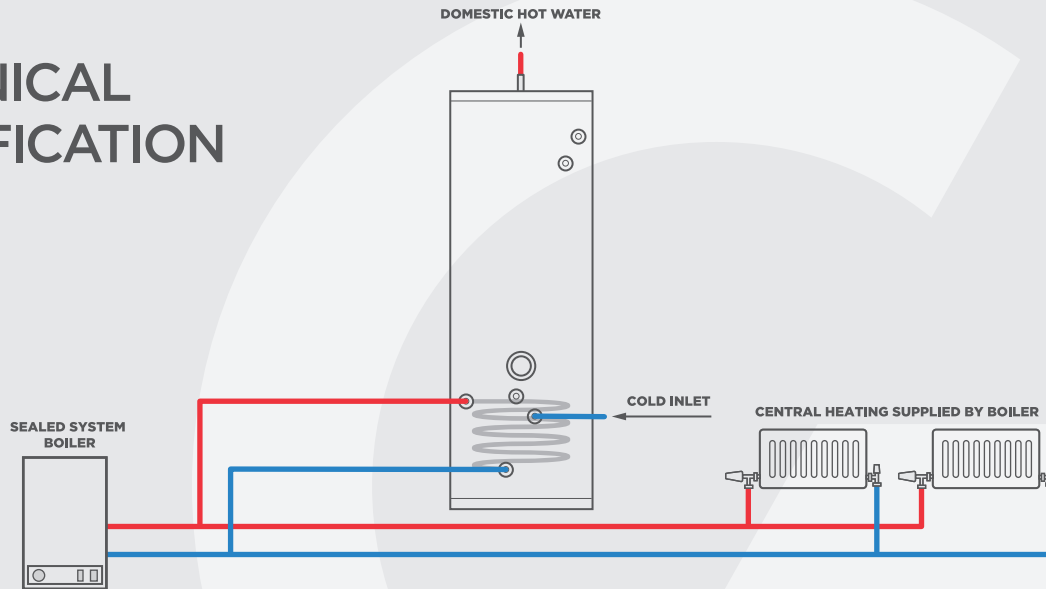

STAINLESS PRO INDIRECT

| Description | | IND90 | IND120 | IND150 | IND180 | IND210 | IND250 | IND300 |
|-----------------------------|--------|---------|----------|----------|----------|----------|----------|----------|
| Product stock code | | PROIN90 | PROIN120 | PROIN150 | PROIN180 | PROIN210 | PROIN250 | PROIN300 |
| ErP rating | | A | B | B | B | B | C | C |
| Heat loss | watts | 32 | 39 | 47 | 55 | 62 | 74 | 86 |
| Capacity | litres | 91 | 119 | 148 | 178 | 208 | 248 | 287 |
| Height | mm | 764 | 931 | 1118 | 1306 | 1494 | 1744 | 1990 |
| Diameter | mm | 550 | 550 | 550 | 550 | 550 | 550 | 550 |
| Weight (empty) | kg | 20 | 23 | 26 | 30 | 33 | 38 | 43 |
| Weight (full) | kg | 111 | 142 | 174 | 208 | 241 | 286 | 330 |
| Heat up time | min | 17 | 21 | 25 | 30 | 32 | 36 | 38 |
| Number of immersions | | 1 | 1 | 1 | 1 | 1 | 2 | 2 |
| Secondary return | | No | No | No | No | Yes | Yes | Yes |

NOTES:

- 1 Heat up time from 15°C to 60°C (applies to primary heat source only)
- 2 For further ErP information, please refer to the installation manual at www.gledhill.net
- 3 The schematics shown above are representational, please refer to the installation manual for full technical requirements

SPARES

Gledhill cylinders are manufactured to the highest quality standards. In the unlikely event that you require a spare part, you can contact Gledhill Spare Parts, on:

01253 474412

or visit www.gledhill-spares.net

HERE TO HELP

If you're looking for technical assistance while you're on the job, give our technical team a call. With many years' experience, they're an invaluable resource to have at the end of the phone.

FOR TECHNICAL
ADVICE PLEASE CALL
01253 474584



Gledhill Building Products Limited
Sycamore Estate,
Squires Gate,
Blackpool FY4 3RL

T: 01253 474550
E: enquiries@gledhill.net

WWW.GLEDHILL.NET



Due to a programme of continuous improvement Gledhill Building Products reserves the right to modify products without prior notice. It is advisable to check the product technical detail by using the latest design and installation manuals available from our technical support team or on our website. It is an offence to copy or adapt this document without consent of the owner.