


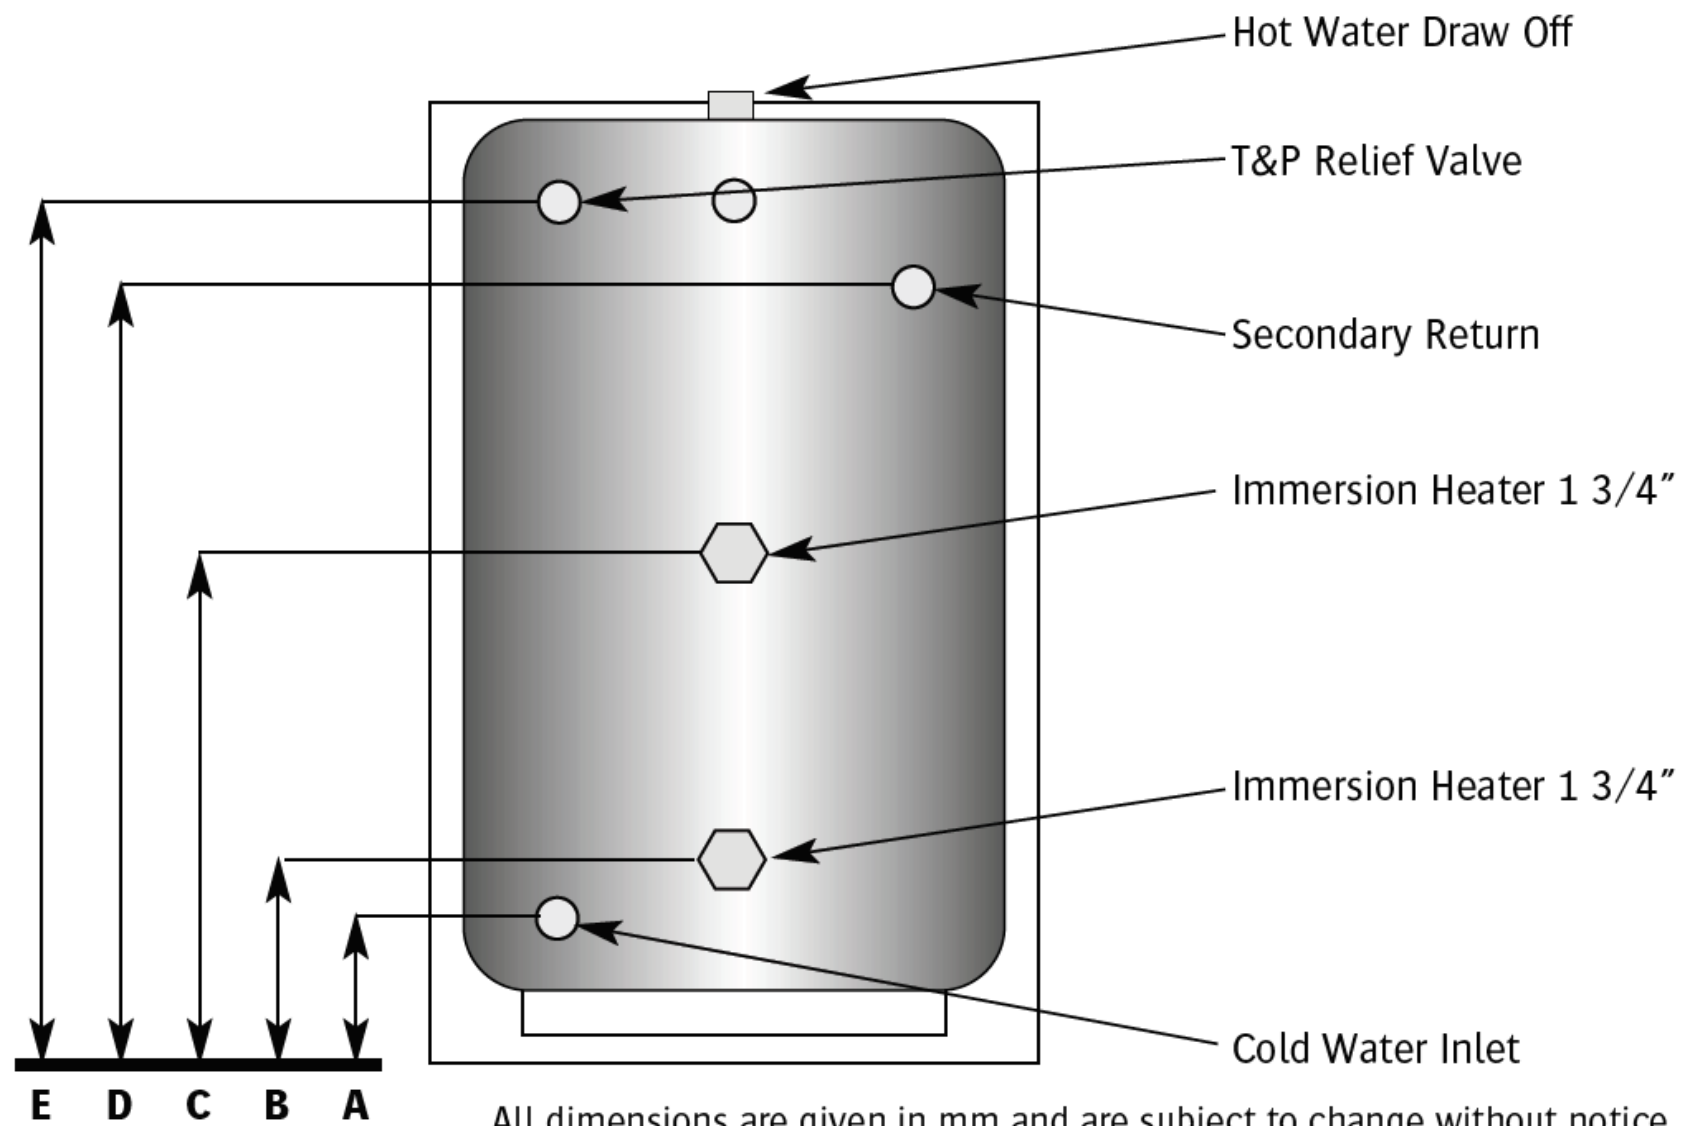

| Cap (LTR) | 90  | 125 | 150  | 170  | 200  | 250  | 300  | 400  | 500  |
|-----------|-----|-----|------|------|------|------|------|------|------|
| Height    | 750 | 880 | 1060 | 1200 | 1120 | 1330 | 1650 | 1590 | 1835 |
| Diameter  | 510 | 510 | 510  | 510  | 554  | 554  | 554  | 660  | 660  |
| A         | 170 | 170 | 170  | 170  | 195  | 195  | 195  | 240  | 240  |
| B         | 200 | 200 | 200  | 200  | 225  | 225  | 225  | 270  | 270  |
| C         | 410 | 410 | 620  | 620  | 645  | 645  | 645  | 690  | 690  |
| D         | -   | -   | -    | -    | 815  | 975  | 1255 | 1240 | 1390 |
| E         | 550 | 750 | 880  | 1030 | 930  | 1140 | 1435 | 1340 | 1590 |

| Cap (L)                           | 90 Ltr  | 125 Ltr | 150 Ltr | 170 Ltr | 200 Ltr | 250 Ltr | 300 Ltr |
|-----------------------------------|---------|---------|---------|---------|---------|---------|---------|
| Product Code                      | HURD090 | HURD125 | HURD150 | HURD170 | HURD200 | HURD250 | HURD300 |
| Time to re-heat from Cold         | 52 Min  | 72 Min  | 86 Min  | 98 Min  | 108 Min | 144 Min | 202 Min |
| Time to re-heat from 75% draw-off | 27 Min  | 37 Min  | 45 Min  | 51 Min  | 63 Min  | 75 Min  | 136 Min |
| Weight                            | 35 KG   | 40 KG   | 45 KG   | 50 KG   | 50 KG   | 60 KG   | 63 KG   |
| ERP Band                          | C       | C       | C       | C       | C       | C       | C       |

|                           |                              |                              |                              |                              |                              |                              |                           |
|---------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|---------------------------|
| <b>Immersion Heater</b>   | 2 x 3Kw 240v<br>single phase | 2 x 3Kw 240v<br>single phase | 2 x 3Kw 240v<br>single phase | 2 x 3Kw 240v<br>single phase | 2 x 3Kw 240v<br>single phase | 2 x 3Kw 240v<br>single phase | 2 x 3Kw 240v single phase |
| <b>Standing Heat Loss</b> | 1.37kwh/24hrs                | 1.48kwh/24hrs                | 1.72kwh/24hrs                | 1.94kwh/24hrs                | 2.04kwh/24hrs                | 2.16kwh/24hrs                | 2.32kwh/24hrs             |

|                                            |
|--------------------------------------------|
| <b>Foam Information</b>                    |
| ODP Ozone Depletion potential = 0          |
| GWP Global Warning Potential = 2.2         |
| Foam Type = Polyurethane                   |
| British Standard 1566, D: 2002             |
|                                            |
| <b>Parts Supplied</b>                      |
| 2 x 3Kw Immersion Heater 240V single Phase |
| Expansion Vessel                           |
| Temperature & Pressure Relief              |
| 3Bar Inlet Control Group                   |