


TORNADO DIRECT

TECHNICAL DATA

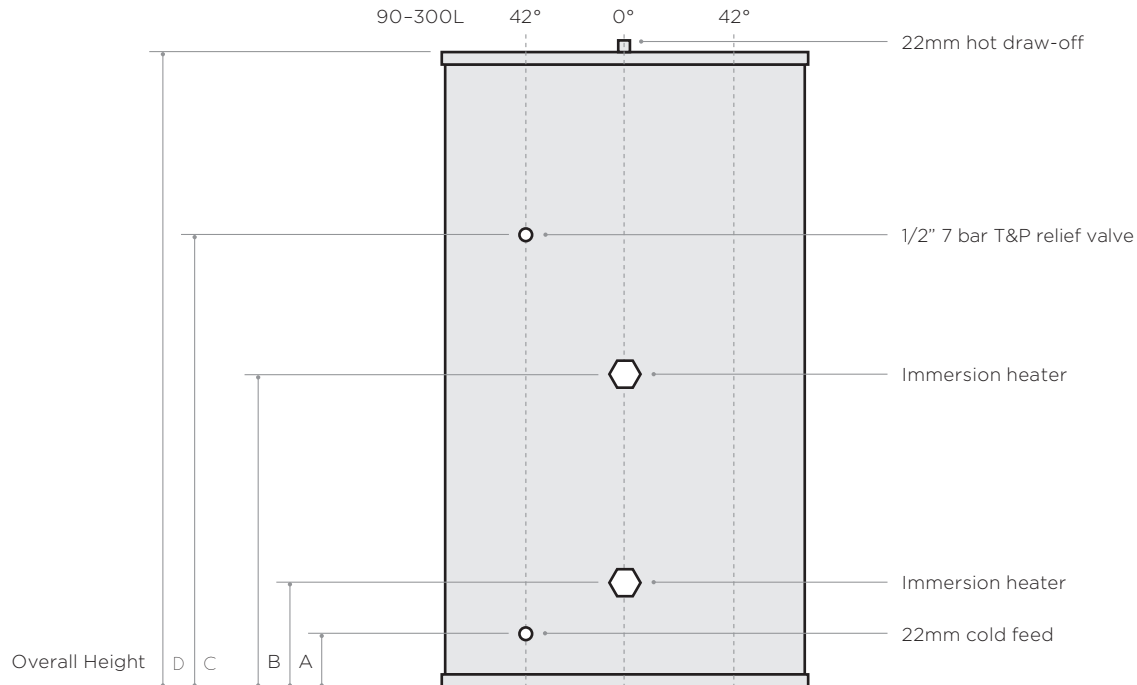

Capacity (L)	125	150	170	200	250	300
Height (mm)	1025	1260	1325	1550	1800	2050
Diameter (mm)	580	580	580	580	580	580
A (mm)	178	178	178	178	178	178
B (mm)	200	200	200	200	200	200
C (mm)	665	900	965	1020	1250	1400
D (mm)	800	950	1065	1150	1350	1500

Capacity (L)	125	150	170	200	250	300
Reheat from cold (minutes)	72	86	98	108	144	202
Reheat from 75% draw-off (minutes)	37	45	51	63	75	136
ERP Rating*	C	C	C	C	C	C
Immersion Rating (kW)	2 x 3	2 x 3	2 x 3	2 x 3	2 x 3	2 x 3
Standing Heat Loss (kWh/24hrs)	1.17	1.24	1.27	1.53	1.68	1.87

*Based on thermostat set at 60°C